


M331

THERMAL TRANSFER RIBBON WAX/RESIN | NEAR EDGE

A Near Edge wax/resin ribbon specifically crafted for in-line packaging applications and print-and-apply systems where speed is essential. This highly adaptable and user-friendly ribbon consistently delivers all the features needed for high-volume, just-in-time printing at optimal performance levels. It is equally capable of printing on both labels and flexible films.

CHARACTERISTICS

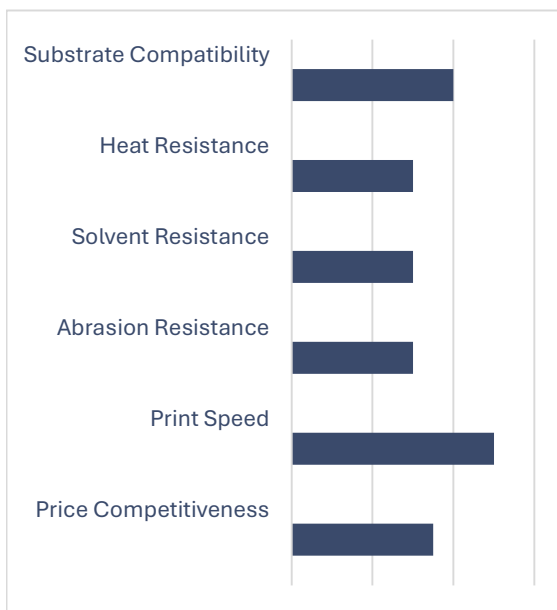

KEY FEATURES

- Designed for fast in-line packaging applications.
- Direct replacement for various TTO printer brands.
- Excellent high-speed printing and substrate compatibility.

PHYSICAL PROPERTIES

Colour	Black
Film thickness	4.5 ± 0.3 μ
Ink Thickness	2.5 ± 0.2 μ
Total Thickness	7.0 ± 0.5 μ
Ink Melting Point	70°C

RECOMMENDED

APPLICATIONS

High-Speed Printing, Flexible Packaging, Date & Code Printing, Hang Tags

RECOMMENDED SUBSTRATES

Coated & Uncoated Papers, Gloss Paper, Synthetics, Polypropylene, Polyethylene, Polystyrene, Vinyl, Polyesters, Polyimide, PVC